



Type Document	Product Specification	Revised /Edition	H
Date Issued	2010/01/28	Data Revised	2020/12/18
Subject : JS-6350W-TH/TM/TL JS-6350H-TH/TM/TL JS-6350WX JS-6350WSF JS-6350WSM JS-6350WRF JS-6350WRM Pitch : 6.35mm Wire to Board Power Connector Series.			Issued By: Engineering Dept.

This specification is referred to 6.35mm series wire to board Power connector.

本規格書內容係提供 6.35 mm 系列產品相關參考，
 其用途為電線端相接於電路板端動力電源連接器

-INDEX-

- 1.0 Product Name/Part Number & Drawing Number. (產品名稱 / 產品型號及圖面型號)
- 2.0 Construction/Dimensions/Material & Surface Finish.(材質以及表面鍍層)
- 3.0 Characteristic.(產品特性)
- 4.0 Specimen.(樣本圖示)
- 5.0 Applicable Standards.(適用規範)
- 6.0 Mechanical Performance.(機械性能)
- 7.0 Electrical Performance.(電氣性能)
- 8.0 Environmental Performance.(環境性能)
- 9.0 Insertion Force (I.F.) & Withdrawal Force (W.F.) for user reference(插入力與拔出參考規格)
- 10.0 Remark (備註).

REV. (版次)	Revision Record (改版變更原因)	Date(日期)	ECN No
C	1.增列 Lock Yield Strength ; Terminal Insertion Force . 兩項規格 2.參照 CSA 規範修改 Wire Pullout Force(Axial)內容. 3.修改耐電壓為 2900V AC 4.因原廠無 Pin 針保持力規格故刪除 5. 依 UL 安規申請內容修改操作溫度為-25℃~+85℃	2011/07/01	EC2011-07-001
D	1.增加耐久性 2.刪除硫化氫 3.修正(EIA-364) 參考規範 4. 依安規認證增列額定電壓 5.增加料號編碼JS-6350WX-XX	2011/11/04	EC2011-11-001
E	1 增列 Nylon 66UL94V-0 P/N (V0)選項 2. 6.1項Insertion Force & Withdrawal Force 修訂為Per Pin 2.50 Kg/f x Poles No. 3 增列6.2項(CSA C22.2 No.182.3)規範 4.Solder Ability 附註Tin Plated : 95% / Gold Plated : 75% 5 增列Wave Peak Soldering In- Process Temperature Profile	2013/11/11	EC2013-11-011
F	1 增訂 8.7 項 Cold(Low Temperature)耐寒試驗, EIA-364-59A 2 增訂 3.5 項 Storage of Package 以及 3.6 項 Floor Life 3.修訂 Wave Peak Soldering In- Process Temperature Profile 4. Thumb Latch Yield Strength 修正為 15.9 kgf/Min.	2014/11/27	EC2014-11-027
G	將環境溫度範圍改為-40℃~+105℃	2016/08/17	EC2016-08-017
H	Delete8.10.1.2 溫度曲線	2020/12/18	EC2020-12-015



喬訊電子工業股份有限公司
CHYAO SHIUNN ELECTRONIC INDUSTRIAL LTD.
 7FL., NO.17, LANE 3, SEC.1 CHUNG CHENG EAST RD.,
 TAMSHUI, TAIPEI, TAIWAN, R.O.C.
 TEL: 886-2-2629-9955 (REP) FAX: 886-2-2626-6677



<http://www.chyaoshiunn.com.tw> E-mail: cs@chyaoshiunn.com.tw

Type Document	Product Specification	Revised /Edition	H
Date Issued	2010/01/28	Data Revised	2020/12/18
Subject : JS-6350W-TH/TM/TL JS-6350H-TH/TM/TL JS-6350WX JS-6350WSF JS-6350WSM Pitch : 6.35mm (Straight) Wire to Board Power Connector Series.			Issued By: Engineering Dept.

1.0 Product Name/Part Number & Drawing Number(產品名稱 / 產品型號及圖面型號) : Note: (xx) The number of the circuits

Product Name(產品名稱)	Part Number(產品型號)	Drawing Number(圖面型號)
Female Crimp Terminal (With AWG #18~22 is applied)	JS-6350W-TL	
Female Crimp Terminal (With AWG #16~20 is applied)	JS-6350W-TM	
Female Crimp Terminal (With AWG #12~14 is applied)	JS-6350W-TH	
Male Crimp Terminal (With AWG #18~22 is applied)	JS-6350H-TL (Solid For 2~5 Circuit)	
Male Crimp Terminal (With AWG #16~20 is applied)	JS-6350H-TM (Solid For 2~5 Circuit)	
Male Crimp Terminal (With AWG #12~14 is applied)	JS-6350H-TH (Solid For 2~5 Circuit)	
Male Crimp Terminal (With AWG #18~22 is applied)	JS-6350H-TL1 (Split For 6~15 Circuit)	
Male Crimp Terminal (With AWG #16~20 is applied)	JS-6350H-TM1 (Split For 6~15 Circuit)	
Male Crimp Terminal (With AWG #12~14 is applied)	JS-6350H-TH1 (Split For 6~15 Circuit)	
Housing (Plug)	JS-6350WF-XXXX / JS-6350WF-XX(V0)	
	JS-6350WM-XXXX / JS-6350WM-XX(V0)	
Wafer Straight	With Male Contacts	JS-6350WSM-XX
	With Female Contacts	JS-6350WSF-XX
	With Male Contacts ; Peg	JS-6350WSM-XXP
	With Female Contacts ; Peg	JS-6350WSF-XXP

2.0 Construction/Dimensions/Material & Surface Finish(材質以及表面鍍層):

Part Name(零件名稱)	Material(材質)	Surface Finish(表面鍍層)
Crimp Terminal (铆壓端子)	Brass	Stamping after tin plated (先電鍍後衝壓)
Housing (電線端連接器)	Nylon 66	UL 94V-0 or UL 94V-2
Wafer , Straight (電路板端連接器)	Contact Pin (導體)	Phosphor Bronze Tin-Plated
	Base (膠座)	Nylon 66 UL 94V-0 or UL 94V-2

3.0 Characteristic(產品特性):

Item(項目)	Standard(標準規範)	
3.1 額定電流 Rated Current	Single Row	2~5 Circuit 12 Amps Max. (With UL1015 AWG #12 is applied)
	Triple Row	6~15 Circuit 9 Amps Max. (With UL1007 AWG #16 is applied)
3.2 額定電壓 Rated Voltage	600V AC/DC	
3.3 Ambient Temperature Range 環境與操作溫度範圍	(操作使用溫度與濕度範圍) Operating Temp.: -40°C~+105°C; 85% R.H. Max Including 30°C Terminal Temperature Rise at rated Current , (包括定額電流內 , 端子所產生 30°C 以下溫昇)	
3.4 Applicable Wire 適用電線	3.4.1 (金屬導體型號) Conductor Construction Size: AWG #12~#22	
	3.4.2 (電線絕緣材質外徑) Wire Insulation O.D.: 1.60mm~4.10mm	
3.5 Storage of Package 包裝未拆封之保存	Temperature and Humidity Condition 溫度 濕度條件	
	Term 保存期限	Temperature 溫度 : -10°C~+40°C Percentage Humidity 相對濕度: 70 % Max 2 Years 1 Year



喬訊電子工業股份有限公司
CHYAO SHIUNN ELECTRONIC INDUSTRIAL LTD.
 7FL., NO.17, LANE 3, SEC.1 CHUNG CHENG EAST RD.,
 TAMSHUI, TAIPEI, TAIWAN, R.O.C.
 TEL: 886-2-2629-9955 (REP) FAX: 886-2-2626-6677



Certificate No: TS 622434 FM 587490









<http://www.chyaoshiunn.com.tw> E-mail: cs@chyaoshiunn.com.tw

Type Document	Product Specification	Revised /Edition	H
Date Issued	2010/01/28	Data Revised	2020/12/18
Subject : JS-6350W-TH/TM/TL JS-6350H-TH/TM/TL JS-6350WX JS-6350WSF JS-6350WSM Pitch : 6.35mm (Straight) Wire to Board Power Connector Series.			Issued By: Engineering Dept.

3.6	Floor Life 拆封後使用期限	Crimp Terminal & Wafer	3 Months
-----	--------------------	------------------------	----------

Note: 適用電路板厚度 Applicable Printed Circuit Board Thickness: 1.6 mm

4.0 Specimen(樣本圖示) :

Part Name / Part Number / Picture or Photograph 零件名稱 / 零件型號 / 樣本圖示			
Female Crimp Terminal JS-6350W-TH/TM/TL		Male Crimp Terminal JS-6350H-TH/TM/TL JS-6350H-TH1/TM1/TL1	
Wafer Straight Female Contact With Peg JS-6350WSF-XXP JS-6350WSM-XXP		Housing (Receptacle) JS-6350WX	
Wafer Straight Female Contact JS-6350WSF-XX (Side View)		Wafer Straight Female Contact JS-6350WSF-XX (Top View)	
Wafer Straight Male Contact JS-6350WSM-XX (Side View)		Wafer Straight Male Contact JS-6350WSM-XX (Top View)	



Type Document	Product Specification	Revised /Edition	H
Date Issued	2010/01/28	Data Revised	2020/12/18
Subject :JS-6350W-TH/TM/TL JS-6350H-TH/TM/TL JS-6350WX JS-6350WSF JS-6350WSM Pitch : 6.35mm (Straight) Wire to Board Power Connector Series.			Issued By: Engineering Dept.

5.0 Applicable Standards(適用規範):

ANSI/EIA 364 ; EIA/ECA 364 Testing method for electrical connectors.

電子連接器，所適用之 ANSI/EIA 364 ; EIA/ECA 364 測試規範

6.0 Mechanical Performance(機械性能):

Item(項目)		Test Condition(測試條件)	Requirement(規格)
6.1	Insertion & Withdrawal Force 嵌入力與拔出力	Insert and withdrawal with connectors at the speed rate of 25.4 ± 3 mm /minute. 連接器兩端勘合，以每一分鐘 25.4 ± 3mm 的速率，作嵌入與拔出往返測試 (EIA/ECA 364-13D) (Excluding Thumb Latch 不包含指壓活動卡榫結合力)	Refer to 9.1 Table1. 參照第 9.1 項 表格 1
6.2	Wire Pullout Force(Axial) 電線脫離端子包覆之拔出力	Pull out the cable from with contact terminal at the speed rate of 25.4± 3 mm/minute. 對端子所包覆電線，施以每一分鐘 25.4± 3 mm 速率之軸向拔出力 (CSA C22.2 No.182.3)	(UL 1015) AWG#12 size wire 15.88kgf/Min.(156N 牛頓)
			(UL 1015) AWG#14 size wire 11.34kgf/Min.(111N 牛頓)
			(UL 1007) AWG#16 size wire 9.08kgf/Min.(89N 牛頓)
			(UL 1007) AWG#18 size wire 9.08kgf/Min.(89N 牛頓)
			(UL 1007) AWG#20 size wire 4.54kgf/Min.(44.5N 牛頓)
6.2			(UL 1007) AWG#22 size wire 3.63kgf/Min.(35.6N 牛頓)
6.3	Crimp Terminal Retention Force (in Housing) 鉚壓端子與膠座之間拔出力	Axial pullout force on the terminal in the plug housing at the speed rate of 25.4 ± 3 mm per minute. (EIA 364-05) 對於已經存在於膠座當中鉚線端子，施以每一分鐘 25.4 ± 3 mm 速率之軸向拔出力	單一導體 Per Contact 最小容許值 6.75kgf/Min.
6.4	Crimp Terminal Insertion Force (into Housing) 鉚壓端子與膠座之間嵌入力	Insert the crimped terminal into the plug housing at the speed rate of 25.4 ± 3 mm per minute. 將已鉚線之端子 以每一分鐘 25.4 ± 3 mm 速率嵌入膠座當中	單一接觸點 Per Contact 最大容許值 0.90kgf/Max.
6.5	Thumb Latch Yield Strength 活動卡榫降伏力	Mate connectors and pull apart until both lock break . record the maximum force. 將連接器組裝之後 再行卸除直到兩側卡榫脫離，並記錄其最大拔出力	最小容許值 15.9 kgf/Min.



Type Document	Product Specification	Revised /Edition	H
Date Issued	2010/01/28	Data Revised	2020/12/18
Subject :JS-6350W-TH/TM/TL JS-6350H-TH/TM/TL JS-6350WX JS-6350WSF JS-6350WSM Pitch : 6.35mm (Straight) Wire to Board Power Connector Series.			Issued By: Engineering Dept.

7.0 Electrical Performance(電氣性能) :

Item(項目)	Test Condition(測試條件)	Requirement(規格)
7.1 Contact Resistance (低階信號) 接觸阻抗	A maximum voltage of 20mV and a maximum current of 100mA are applied to the mate connector. 對組合狀態下連接器，於其兩端施以最大測試電壓 20mV 以及最大測試電流 100mA (EIA/ECA 364-23C) (Does not include wire resistance 不包含電線阻抗)	Contact Resistance: 20 milliohms Max. 最大容許值. 20 毫歐姆
7.2 Insulation Resistance 絕緣阻抗	Apply 500V D/C for 1 minute between adjacent contacts to measure the insulation resistance. 對相鄰兩接觸導體，於一分鐘時間內施予 500V D/C 電壓，並量測其間絕緣阻抗值 (EIA 364-21C)	Insulation Resistance: Initial 1000megohms Min 最初容許值. 1000 兆歐姆
7.3 Withstanding Voltage 耐電壓	Apply 2900V A/C (rms) for 1 minute and the leakage current shall not exceed 0.5mA to the adjacent terminal and ground of the mate connectors. 對組合狀態下連接器，於其相鄰兩導體末端各施以電壓 2900V A/C(實效值) 時間 1 分鐘，且漏電流必須小於 0.5mA(毫安培) (EIA 364-20C)	No breakdown or flashover. 無損毀或者產生火花

8.0 Environmental Performance(環境性能) :

Item(項目)	Test Condition(測試條件)	Requirement(規格)
8.1 Durability 耐久性	Mate Connectors up 50 Cycles at a maximum rate of 10 cycles Per minute prior to environmental test 以組合狀態下連接器且未經環境測試，依每分鐘內進行 10 次嵌入與拔出之最大速率，連續 50 次嵌入與拔出往返測試 (EIA/ECA 364-09C)	(After the test) Contact resistance 40mΩ Max 經耐久性試驗後接觸阻抗 最大容許值 40 毫歐姆
8.2 Temperature Rise (Via Current Cycling) 溫昇 (經由電流循環操作)	Mate connector . measure the temperature rise of contact when the maximum rated current is passed 以組合狀態下連接器，通過最大容許電流 量測其導體溫度上昇值 (EIA 364-70B Conditions 1 . Method 1)	Mate connectors Temperature Rise: +30°C/Max. 組合狀態下之連接器溫度上昇 最大容許值 +30°C



Type Document	Product Specification	Revised /Edition	H
Date Issued	2010/01/28	Data Revised	2020/12/18
Subject :JS-6350W-TH/TM/TL JS-6350H-TH/TM/TL JS-6350WX JS-6350WSF JS-6350WSM Pitch : 6.35mm (Straight) Wire to Board Power Connector Series.			Issued By: Engineering Dept.

Item(項目)	Test Condition(測試條件)	Requirement(規格)
8.3 Vibration 耐振動	<p>A mated connector shall be mounted on a printed Circuit board and subjected to a vibration test of the following conditions.</p> <p>During the test, test current continuity shall be checked. After the test, contact resistance shall be measured. 以組合狀態下連接器焊接於電路板作為試驗樣品,依照隨附如下規格要求,進行耐振動試驗,試驗過程中確認是否產生不連續電流(斷電)現象,並於試驗過後量測其接觸阻抗。(EIA/ECA 364-28E-Condition I)</p> <p>Frequency(頻率) : 10~55~10 Hz/minute.</p> <p>Amplitude (振幅) : 1.5 mm P-P</p> <p>Direction (方向) :1. Axis of up and down.上下軸向(Y 軸) 2. Axis of right the left. 左右軸向(X 軸) 3. Axis of front and back.前後軸向(Z 軸)</p> <p>Period(週期) : 2 hours for each direction. (每一個軸向持續 2 小時)</p>	<p>Initial Contact Resistance :</p> <p>20 milliohms Max.</p> <p>接觸阻抗最初容許值 20 毫歐姆</p> <p>(After the test)</p> <p>Contact Resistance:</p> <p>40 milliohms Max.</p> <p>經耐振動試驗後接觸阻抗最大容許值 40 毫歐姆</p>
8.4 Humidity 恆溫恆濕	<p>A mated connector shall be placed in a humidity chamber of the following conditions. After the test, leave the specimen at room temperature for 1~2 hours before the contact resistance, the insulation resistance and the dielectric withstanding voltage shall be measured.</p> <p>(EIA 364-31B Conditions II. Method A)</p> <p>以組合狀態下連接器放置於恆定溫度與濕度的空間,依照隨附如下規格要求,進行恆溫恆濕試驗,經試驗過後將樣品置於室溫 1~2 小時,再量測其接觸阻抗、絕緣阻抗、以及耐電壓測試。</p> <p>Temperature(溫度) : 40±2°C.</p> <p>Relative Humidity(相對濕度) : 90%~95% (RH).</p> <p>Period(週期) : 96 hours continuously. (持續 96 小時)</p>	<p>(After the test)</p> <p>Contact Resistance:</p> <p>40milliohms Max.</p> <p>經恆溫恆濕試驗後接觸阻抗最大容許值. 40 毫歐姆</p> <p>(After the test)</p> <p>Insulation Resistance :</p> <p>100Megohms Min.</p> <p>經恆溫恆濕試驗後絕緣阻抗最小容許值. 100 兆歐姆</p> <p>經恆溫恆濕試驗後測耐電壓</p> <p>(After the test)</p> <p>Withstanding Voltage:</p> <p>2900V A/C for 1 minute</p>



喬訊電子工業股份有限公司
CHYAO SHIUNN ELECTRONIC INDUSTRIAL LTD.
 7FL., NO.17, LANE 3, SEC.1 CHUNG CHENG EAST RD.,
 TAMSHUI, TAIPEI, TAIWAN, R.O.C.
 TEL: 886-2-2629-9955 (REP) FAX: 886-2-2626-6677



<http://www.chyaoshiunn.com.tw> E-mail: cs@chyaoshiunn.com.tw

Type Document		Product Specification	Revised /Edition	H
Date Issued		2010/01/28	Data Revised	2020/12/18
Subject : JS-6350W-TH/TM/TL JS-6350H-TH/TM/TL JS-6350WX JS-6350WSF JS-6350WSM Pitch : 6.35mm (Straight) Wire to Board Power Connector Series.				Issued By: Engineering Dept.
Item(項目)	Test Condition(測試條件)		Requirement(規格)	
8.5	Thermal Shock 冷熱衝擊	<p>A mated connector shall be subjected to a thermal shock test of the following conditions. After the test, leave the specimen at room temperature for 1~2 hours before the contact resistance, the insulation resistance and the dielectric withstanding voltage shall be measured.</p> <p>以組合狀態下連接器作為試驗樣品，依照隨附如下規格要求，進行冷熱衝擊試驗，經試驗過後將樣品置於室溫 1~2 小時，再量測其接觸阻抗、絕緣阻抗、以及耐電壓測試。 (EIA/ECA 364-32D)</p> <p>One Cycle Consists Of:</p> <p>-55°C+0/-3°C for 30 minutes. → Room Temp. 5 minutes 85°C+3/-0°C for 30 minutes. → Room Temp. 5 minutes</p> <p>Total Cycles: 5 Cycles. 以 -55°C +0/-3°C 溫度持續 30 分鐘，經室溫 5 分鐘，而後再以 85°C +3/-0°C 溫度持續 30 分鐘，再經室溫 5 分鐘，構成一次冷熱循環，總計循環次數 5 次。</p>	Same as paragraph 8.4 同 8.4 章節	
8.6	Thermal Aging 高溫老化試驗	<p>A mated connector shall be placed in a heat oven of the following conditions. After the test, leave the specimen at room temperature for 1~2 hours before the contact resistance shall be measured. 以組合狀態下連接器放置於加熱烤箱當中，依照隨附如下規格要求，進行高溫老化試驗，經試驗過後將樣品置於室溫 1~2 小時，再量測其接觸阻抗。</p> <p>(EIA 364-17B Conditions 3 . Method A)</p> <p>Temperature(溫度) : 105±2°C</p> <p>Period(週期): 96 hours continuously . (持續 96 小時)</p>	<p>Initial Contact Resistance : 20 milliohms Max. 接觸阻抗最初容許值 20 毫歐姆</p> <p>(After the test)</p> <p>Contact Resistance : 40milliohms Max. . 經高溫老化試驗後接觸阻抗 最大容許值.40 毫歐姆</p>	
8.7	Cold 耐寒試 (Low Temperature)	<p>A mated connector shall be placed in a cold chamber of the following conditions. After the test, leave the specimen at room temperature for 1~2 hours before the contact resistance shall be measured. 以組合狀態下連接器放置於低溫空間內，依照隨附如下規格要求，進行耐寒試驗，經試驗過後將樣品置於室溫 1~2 小時，再量測其接觸阻抗。</p> <p>(EIA 364-59A Condition D ; Condition 4)</p> <p>Temperature(溫度) : -40±3°C.</p> <p>Period(週期): 96 hours continuously . (持續 96 小時)</p>	<p>Initial Contact Resistance : 20 milliohms Max. 接觸阻抗最初容許值 20 毫歐姆</p> <p>(After the test)</p> <p>Contact Resistance : 40 milliohms Max. . 經耐寒試驗後接觸阻抗： 最大容許值. 40 毫歐姆</p>	



喬訊電子工業股份有限公司
CHYAO SHIUNN ELECTRONIC INDUSTRIAL LTD.
 7FL., NO.17, LANE 3, SEC.1 CHUNG CHENG EAST RD.,
 TAMSHUI, TAIPEI, TAIWAN, R.O.C.
 TEL: 886-2-2629-9955 (REP) FAX: 886-2-2626-6677



Certificate No: TS 622434 FM 587490

<http://www.chyaoshiunn.com.tw> E-mail: cs@chyaoshiunn.com.tw

Type Document	Product Specification	Revised /Edition	H
Date Issued	2010/01/28	Data Revised	2020/12/18
Subject : JS-6350W-TH/TM/TL JS-6350H-TH/TM/TL JS-6350WX JS-6350WSF JS-6350WSM Pitch : 6.35mm (Straight) Wire to Board Power Connector Series.			Issued By: Engineering Dept.

Item(項目)	Test Condition(測試條件)	Requirement(規格)
8.8 Salt Spray 鹽水噴霧	<p>A mated connector shall be subjected to a Salt Spray test of the following conditions. After the test , the specimen shall be washed with running water and dried naturally before the measurement of contact resistance.以組合狀態下連接器作為試驗樣品, 依照隨附如下規格要求, 進行鹽水噴霧試驗 , 試驗過後將樣品用清水沖洗並經過自然風乾 , 而後量測其接觸阻抗。</p> <p>Density(鹽水密度): 5 % in weight.</p> <p>Temperature(溫度): 35±2°C.</p> <p>Period(週期): Terminal or contact (Stamping after tin plated for 8 hours) ; Terminal or contact (Stamping before tin plated for 48 hours) 端子或導體(先電鍍後沖壓 8 小時) ; 端子或導體 (先沖壓後電鍍 48 小時) (EIA 364-26B Conditions B)</p>	<p>Initial Contact Resistance : 20 milliohms Max.</p> <p>接觸阻抗最初容許值 20 毫歐姆</p> <p>(After the test) Contact Resistance: 40 milliohms Max.</p> <p>經鹽水噴霧試驗後接觸阻抗 最大容許值. 40 毫歐姆</p>
8.9 Solder Ability 焊錫性	<p>Fluxed soldering section of header shall be dipped in solder of the following conditions. 將連接器 pin 針基板嵌入端, 接觸熱溶狀錫料, 依照隨附如下規格要求, 進行焊錫性試驗</p> <p>Solder Temperature (焊錫溫度) : 245 ± 5°C.</p> <p>Immersion Period (沉浸週期) : 3 ±0.5 Seconds (操作方式) : 料件焊錫位置, 距離導體末端 1.5mm</p> <p>Method : 1.5mm from contact pin tip (EIA 364-52B)</p>	<p>Solder entirely (95%) of immersed area must show no voids or pinholes.</p> <p>焊料覆蓋面積必須達到 95%, 而且不能產生氣孔或空隙</p>
8.10 Resistance to Soldering Heat 焊錫耐熱性	<p>Resistance to soldering heat 能夠承受焊錫耐熱範圍: Refer to Temperature Profile 請參 8.10.1.1 溫度曲線圖 (EIA-364-71B)</p> <p>by soldering iron 手工烙鐵焊錫適用溫度範圍: 350 ± 5°C 3±0.5Seconds. (操作方式) : 料件焊錫位置, 距離導體末端 1.5mm</p> <p>Method : 1.5mm from contact pin tip (EIA/ECA 364-56C Procedure 3. Conditions A)</p>	<p>No deformation or damage.</p> <p>不可有變形或損壞</p>

Notes : Flowing Mixed Gas (EIA 364-65A) shall be conduct by Customer request 混合流動氣體測試依照客戶需求



喬訊電子工業股份有限公司
CHYAO SHIUNN ELECTRONIC INDUSTRIAL LTD.
 7FL., NO.17, LANE 3, SEC.1 CHUNG CHENG EAST RD.,
 TAMSHUI, TAIPEI, TAIWAN, R.O.C.
 TEL: 886-2-2629-9955 (REP) FAX: 886-2-2626-6677



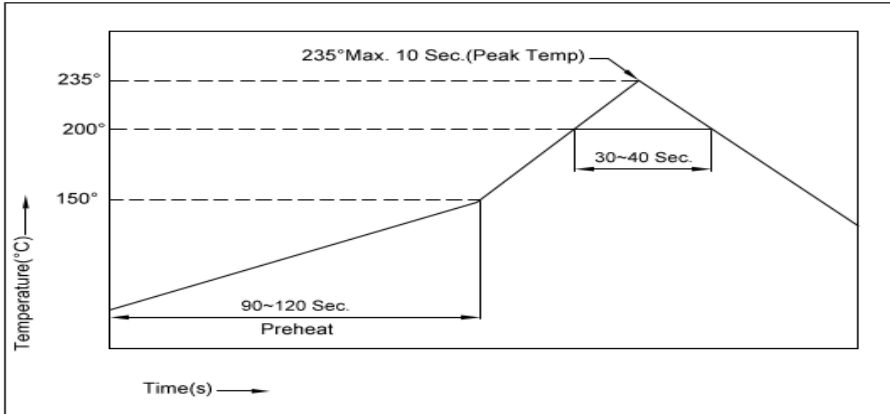
Certificate No:TS 622434 FM 587490

<http://www.chyaoshiunn.com.tw> E-mail:cs@chyaoshiunn.com.tw

Type Document	Product Specification	Revised /Edition	H
Date Issued	2010/01/28	Data Revised	2020/12/18
Subject :JS-6350W-TH/TM/TL JS-6350H-TH/TM/TL JS-6350WXJS-6350WSF JS-6350WSM Pitch : 6.35mm (Straight) Wire to Board Power Connector Series.			Issued By: Engineering Dept.

8.10.1 Temperature Profile(溫度曲線圖) :

8.10.1.1 Wave Peak Soldering In-Lead Free Process 波峰焊無鉛制程



9.0 Tables & Attachments

9.1 Table 1. Insertion Force (I.F.) & Withdrawal Force (W.F.) for user reference:

Unit : Kg/f

No. of Circuits 極數	AT INITIAL 首次嵌入與拔出(初始值)		AT 50 TH 50 次嵌入與拔出之後	No. of Circuits 極數	AT INITIAL 首次嵌入與拔出(初始值)		AT 50 TH 50 次嵌入與拔出之後
	I.F. (MAX) 插入力	W.F. (MIN) 拔出力	W.F. (MIN) 拔出力		I.F. (MAX) 插入力	W.F. (MIN) 拔出力	W.F. (MIN) 拔出力
	02	5.0	0.46		0.32	06	15.0
03	7.5	0.68	0.48	09	22.5	2.04	1.42
04	10.0	0.92	0.64	12	30.0	2.74	1.92
05	12.5	1.16	0.80	15	37.5	3.44	2.40

10.0Remark(備註) : Any change or revision for the product specification will not be announced in advance.

Please contact our sales representative for the latest information.

有關規格書內容經變更或改版，如未能夠及時發佈與通知，煩請連絡我司業務人員以提供產品最新資訊

Reviewed: Tom Shih **Approved:** Tom Shih **Verified:** Erin Chou