




- SPECIFICATIONS**
- Voltage rating : 50V AC
  - Current Rating : 0.5A AC/DC
  - Withstanding Voltage : 250V AC/minute
  - Insulation Resistance : 50MΩ min.
  - Temperature Range : - 25℃ to + 85℃
  - Contact Resistance : 40mΩ max.

- FPC CONNECTORS**
- Part No. : JS-1194D1-XX (XX)

- Code No.
- ① Poles : 13 ~61
  - ② Contacts Plating : G1 : Gold Flash Over Nickel
- Material :
1. Contacts : Phosphor Bronze
  2. Solder Tab : Phosphor Bronze
  3. Housing : LCP UL 94V-0 ; Color : Narture
  4. Cover : LCP UL 94V-0 ; Color : Black
- Plating : Contacts : Refer Above Options  
Solder Tab : Tin over nickel
- Packing : Type&Reel

Recommend PCB Layout  
General Tolerance ±0.05

Recommend FPC/FFC Dimension

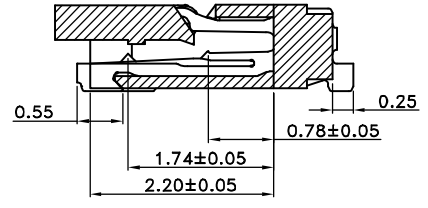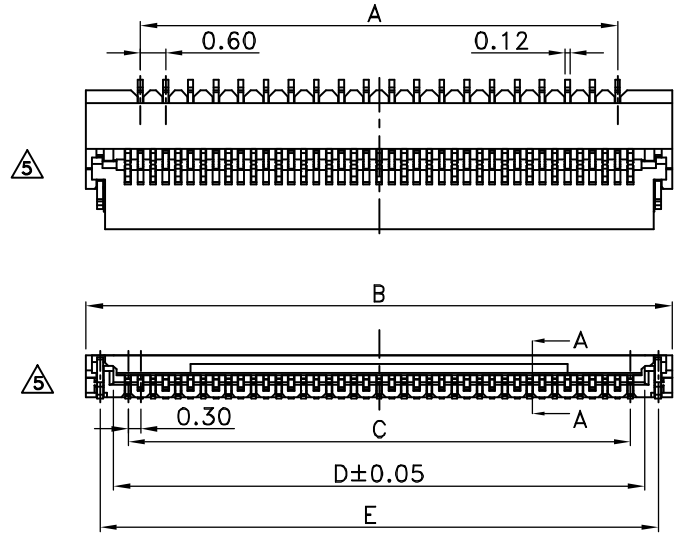

Section:A-A  
Scale 2:1

Poles	Dimension(mm)				
	A	B	C	D	E
13	3.00	5.60	3.60	4.28	4.93
15	3.60	6.20	4.20	4.88	5.53
21	5.40	8.00	6.00	6.68	7.33
23	6.00	8.60	6.60	7.28	7.90
25	6.60	9.20	7.20	7.88	8.53
29	7.80	10.40	8.40	9.08	9.73
31	8.40	11.00	9.00	9.68	10.33
33	9.00	11.60	9.60	10.28	10.93
35	9.60	12.20	10.20	10.88	11.53
39	10.80	13.40	11.40	12.08	12.73
41	11.40	14.00	12.00	12.68	13.33
45	12.60	15.20	13.20	13.88	14.53
51	14.40	17.00	15.00	15.68	16.33
61	17.40	20.00	18.00	18.68	19.33

**喬訊電子工業股份有限公司**  
**CHYAO SHIUNN**  
**ELECTRONIC INDUSTRIAL LTD.**

**PART NO** JS-1194D1-XX  
**0.30mm SMT Series (Easy on)ZIF FPC/FFC Connector**

APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
Tom Shih		mm	.0 ±0.30	▲	修正尺寸表，產品外觀	吳弘文	2012/08/23	▲			
CHECKED BY	PROJ	VER NO.	.00 ±0.20	▲	增加電鍍選項	吳弘文	2012/11/23	▲			
Erin Chou		a6	.000 ±0.10	▲	修改電鍍選項	吳弘文	2014/08/01	▲			
DRAWN BY	DATE	SIZE	ANGLE		修正塑膠本體顏色	吳弘文	2014/10/24	CUSTOMER			
Eddie	2019/05/22	A4	0° ±1°	▲	修改尺寸表，產品外觀，本體顏色	吳弘文	2015/10/06				
			.0° ±	▲	尺寸表刪除無生產P數	Eddie	2019/05/22				
			SHEET	1/1				Conforms to The RoHS Instruction			