
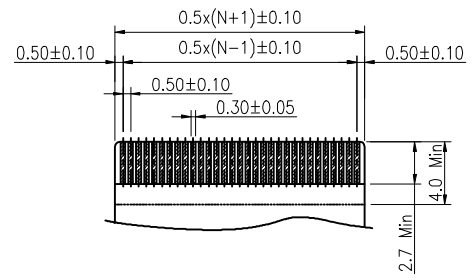
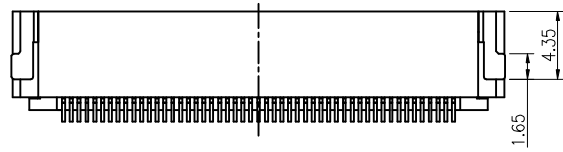
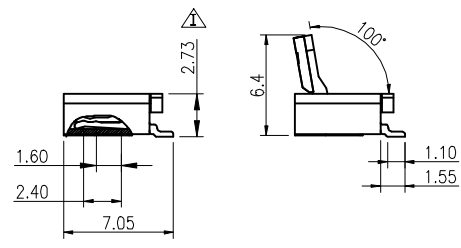
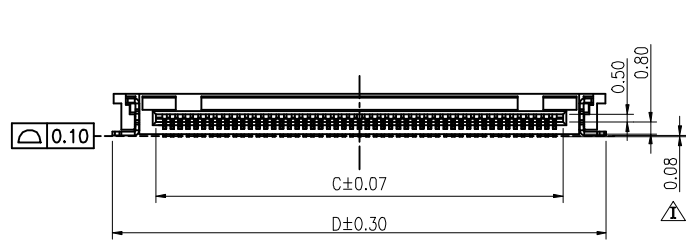


REV	ECN.NO.	REVISIONS	REV.DRAWN	DATE
F		增加端子黄铜规格	Zuochao	2014.09.02
G		增加6~8pin 规格	YangSong	2015.09.29
H		修改产品使用温度	GZ.yang	2016.10.24
I		焊锡面尺寸增加0.03mm	YangSong	2018.10.08


SPECIFICATIONS

- . Rated Voltage : 50V AC
- . Rated Current : 0.5A AC/DC
- . Withstanding Voltage : 500V AC/minute
- . Insulation Resistance : 500MΩ min
- . Temperature Range : - 40°C to + 105°C
- . Contact Resistance : 20mΩ max

- Notes:
- Part No. : JS-0505-XXWLXX-X-XX-XX
 - Poles: 09~61
 - Blank: with 'CS' logo
 - WL: without 'CS' logo
 - Blank: Tin Plating
 - (M): matte Sn
 - GO: Gold plating
 - GM: Gold/matte Sn
 - G1M: Gold/matte Sn (Au>3u" Sn>100u" Ni>30u")
 - BR: Brass
 - Blank: Phosphor Bronze
 - Blank: Normal
 - NH: Halogen Free
 - Blank&P: Paper Plate(Reel)
 - S: Plastic Plate(Reel)
 - U: Tube
 - Material : Contact & Mounted Ear : Copper Alloy
 - Base : High Temp Thermoplastic, UL94V-0 ; Color: Nature of material
 - Cover : High Temp. Thermoplastic, UL94V-0 ; Color: Black
 - Q' ty : 1500 Pcs/Reel
 - Halogen free product identification LOGO on the packing

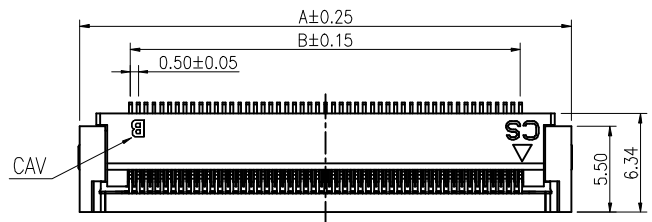

RECOMMENDED FFC/FPC DIMENSION (THICKNESS 0.3±0.03)

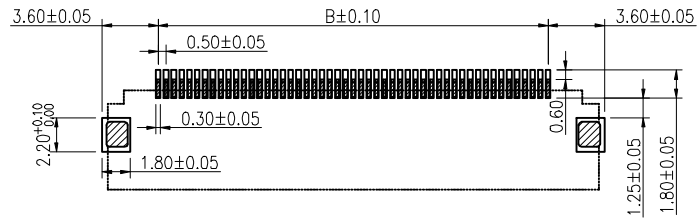

RECOMMENDED PCB LAYOUT

POLES	DIMENSIONS				POLES	DIMENSIONS				POLES	DIMENSIONS			
	A	B	C	D		A	B	C	D		A	B	C	D
6	9.0	2.5	3.6	9.15	25	18.5	12.0	13.1	18.65	44	28.0	21.5	22.6	28.15
7	9.5	3.0	4.1	9.65	26	19.0	12.5	13.6	19.15	45	28.5	22.0	23.1	28.65
8	10.0	3.5	4.6	10.15	27	19.5	13.0	14.1	19.65	46	29.0	22.5	23.6	29.15
9	10.5	4.0	5.1	10.65	28	20.0	13.5	14.6	20.15	47	29.5	23.0	24.1	29.65
10	11.0	4.5	5.6	11.15	29	20.5	14.0	15.1	20.65	48	30.0	23.5	24.6	30.15
11	11.5	5.0	6.1	11.65	30	21.0	14.5	15.6	21.15	49	30.5	24.0	25.1	30.65
12	12.0	5.5	6.6	12.15	31	21.5	15.0	16.1	21.65	50	31.0	24.5	25.6	31.15
13	12.5	6.0	7.1	12.65	32	22.0	15.5	16.6	22.15	51	31.5	25.0	26.1	31.65
14	13.0	6.5	7.6	13.15	33	22.5	16.0	17.1	22.65	52	32.0	25.5	26.6	32.15
15	13.5	7.0	8.1	13.65	34	23.0	16.5	17.6	23.15	53	32.5	26.0	27.1	32.65
16	14.0	7.5	8.6	14.15	35	23.5	17.0	18.1	23.65	54	33.0	26.5	27.6	33.15
17	14.5	8.0	9.1	14.65	36	24.0	17.5	18.6	24.15	55	33.5	27.0	28.1	33.65
18	15.0	8.5	9.6	15.15	37	24.5	18.0	19.1	24.65	56	34.0	27.5	28.6	34.15
19	15.5	9.0	10.1	15.65	38	25.0	18.5	19.6	25.15	57	34.5	28.0	29.1	34.65
20	16.0	9.5	10.6	16.15	39	25.5	19.0	20.1	25.65	58	35.0	28.5	29.6	35.15
21	16.5	10.0	11.1	16.65	40	26.0	19.5	20.6	26.15	59	35.5	29.0	30.1	35.65
22	17.0	10.5	11.6	17.15	41	26.5	20.0	21.1	26.65	60	36.0	29.5	30.6	36.15
23	17.5	11.0	12.1	17.65	42	27.0	20.5	21.6	27.15	61	36.5	30.0	31.1	36.65
24	18.0	11.5	12.6	18.15	43	27.5	21.0	22.1	27.65					

X.± 0.40	X'± 5.0'	UNITS	NAME(INTENDED USE)	CHYAO SHIUNN ELECTRONIC (SHANGHAI) CO.,LTD.
.X± 0.30	.X'± 2.0'			
.XX± 0.20	.XX'± 1.0'	FINISH	PART NO.(INTENDED USE)	TITLE:
.XXX± 0.10	.XXX'± ---			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CHYAO SHIUNN ELECTRONIC CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF CHYAO SHIUNN ELECTRONIC CO., LTD.			APPD:	DWG NO.:
			CHKD:	020-0119-0505-XX
			DR: sunquan	2010.09.27
			SCALE	SHEET
			2:1	1/1
			REV.1	/



符合环境管理物质