
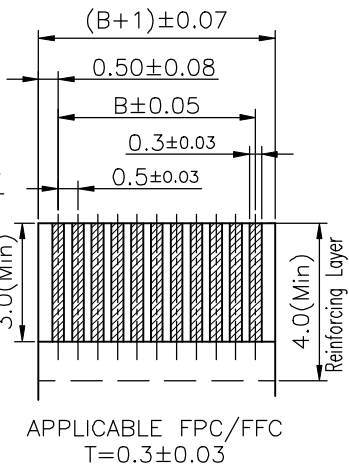
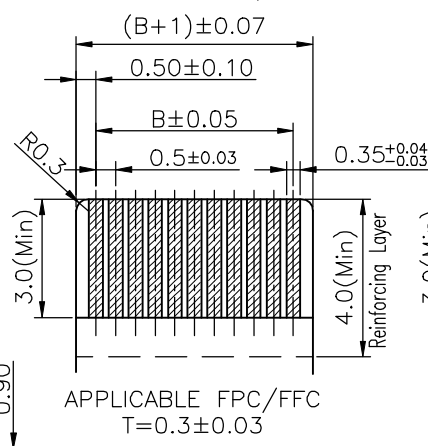
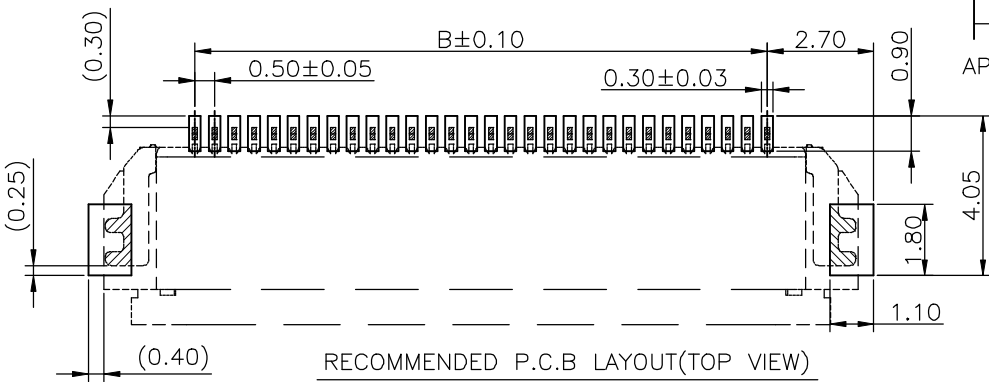
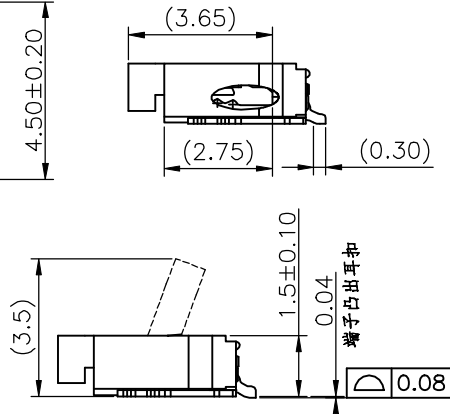
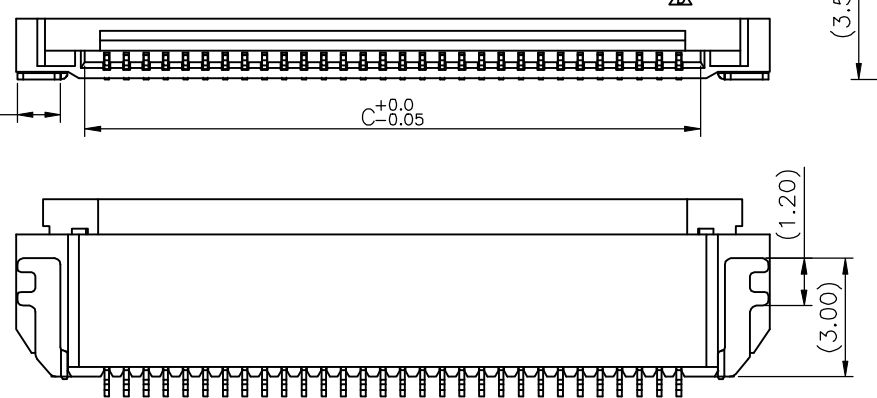
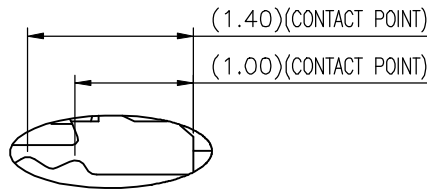


A4

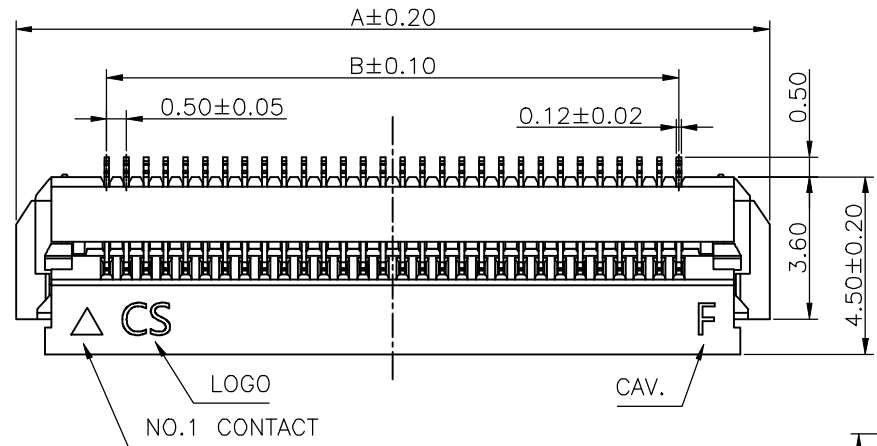

REV.	ECN NO.	REVISIONS	REV.DRAWN	DATE
A		初版发行	sunquan	2014/01/27
B		增加G1电镀规格	sunquan	2014/04/18
C		增加G0电镀规格	Zuochao	2014/07/02
D	17014	增加盖子强度	YangSong	2017/06/19
E		增加尺寸管控	YangSong	2018/06/22

NOTES:

- MATERIAL: HOUSING: HIGH TEMP PLASTIC,UL94V-0; COLOR: NATURE
ACTUATOR: HIGH TEMP PLASTIC,UL94V-0; COLOR: BLACK
TERMINAL&EAR: COPPER ALLOY; FINISH: SEE PART No.
- PART NO.: JS-0507-XXXX-NH
POLES: 04~60 NH: HALOGEN FREE
M: MATTE SN (Sn>100μ" Ni>30μ")
G1: GOLD PLATED (Au>3μ" Ni>30μ")
G0: GOLD PLATED (Au>0.8u" Ni>30u")
GM: GOLD PLATED (CONTACT AREA: Au>3μ" Ni>30μ")
MATTE SN(SOLDER AREA: Sn>100μ" Ni>30μ")
- HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON THE PACKING

Poles	A	B	C	Poles	A	B	C
04	6.10	1.50	2.60	33	20.60	16.00	17.10
05	6.60	2.00	3.10	34	21.10	16.50	17.60
06	7.10	2.50	3.60	35	21.60	17.00	18.10
07	7.60	3.00	4.10	36	22.10	17.50	18.60
08	8.10	3.50	4.60	37	22.60	18.00	19.10
09	8.60	4.00	5.10	38	23.10	18.50	19.60
10	9.10	4.50	5.60	39	23.60	19.00	20.10
11	9.60	5.00	6.10	40	24.10	19.50	20.60
12	10.10	5.50	6.60	41	24.60	20.00	21.10
13	10.60	6.00	7.10	42	25.10	20.50	21.60
14	11.10	6.50	7.60	43	25.60	21.00	22.10
15	11.60	7.00	8.10	44	26.10	21.50	22.60
16	12.10	7.50	8.60	45	26.60	22.00	23.10
17	12.60	8.00	9.10	46	27.10	22.50	23.60
18	13.10	8.50	9.60	47	27.60	23.00	24.10
19	13.60	9.00	10.10	48	28.10	23.50	24.60
20	14.10	9.50	10.60	49	28.60	24.00	25.10
21	14.60	10.00	11.10	50	29.10	24.50	25.60
22	15.10	10.50	11.60	51	29.60	25.00	26.10
23	15.60	11.00	12.10	52	30.10	25.50	26.60
24	16.10	11.50	12.60	53	30.60	26.00	27.10
25	16.60	12.00	13.10	54	31.10	26.50	27.60
26	17.10	12.50	13.60	55	31.60	27.00	28.10
27	17.60	13.00	14.10	56	32.10	27.50	28.60
28	18.10	13.50	14.60	57	32.60	28.00	29.10
29	18.60	14.00	15.10	58	33.10	28.50	29.60
30	19.10	14.50	15.60	59	33.60	29.00	30.10
31	19.60	15.00	16.10	60	34.10	29.50	30.60
32	20.10	15.50	16.60				

X. ± 0.40	X.* ± 5.0*	UNITS: mm	NAME(INTENDED USE):	CHYAO SHUINN ELECTRONIC (SHANGHAI) CO.,LTD.
.X ± 0.30	.X* ± 2.0*	MATERIAL:	CUSTOMER	
.XX ± 0.20	.XX* ± 1.0*	SEE NOTE	PART NO.(INTENDED USE):	TITLE: 0.5mm Pitch<H=1.5mm> ZIF TYPE R/A SMT FPC CONNCTOR
.XXX± 0.10	.XXX*± --	FINISH:	JS-0507-XX	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CHYAO SHUINN ELECTRONIC CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF CHYAO SHUINN ELECTRONIC CO., LTD.			APPD:	DWG NO.:
Q'TY:	SEE NOTE	SEE NOTE	CHKD:	020-0166-0507-XX
DR:	sunquan	2014/01/27	DR:	SCALE SHEET REV.
				5:1 1/1 D

符合环境管理物质



RECOMMENDED P.C.B LAYOUT(TOP VIEW)
GENERAL TOLERANCE: ±0.05